
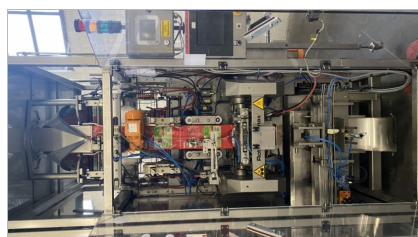
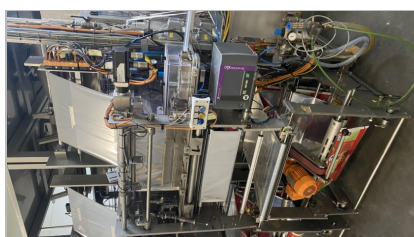


SOLD

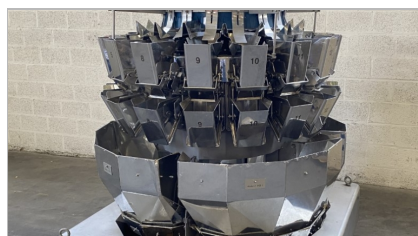

FILLING, WEIGHING AND PACKAGING LINE "ISHIDA - ROVEMA - PAAL" - MODULE 2

Consisting of:

"Ishida" Multihead weigher

Type CCW-M-216W-D/30-SS

- Heads: 16 pieces
- Performance: up to 2 x 40 weighing's/min
- Filling weight (max. weight): 1.500 g
- Accuracy: Average value 0 to + 1.0 g
- Weighing range: 14-1000 g
- Max. volume: 4,500 cc (per individual weighing)
- Minimum division: 0.2 g
- Display: Touch-screen display
- Power: 230V, 50Hz
- Connected load: 1.7 kVA

+

Vertical flowpackaging line "Rovema"

Type VPK260 - 14113

- yoc 2001
- Performance (mech.) cycles/min: 180
- Roll width / diameter (max.) (mm): 450 / 550 (600 / 550 with pre-unrolling)
- Bag width (min. - max.) (mm): 60-260
- Bag length (min. - max.) (mm): 120-600
- Fill volume (max.) (cm³): 6000
- Sealing pressure (max.) (N): 5000 (optional: 8000)
- Program memory: Standard: 100 (optional: 1000)
- Dimensions: (L x W x H) (mm): 2.200 x 1.430 x 1.620 mm
- Weight: 920 kg
- Power supply (volts): 230 / 400
- Energy requirement (kVA): 8
- Protection class: IP54
- Compressed air connection: 6 bar
- Air consumption 6 bar (NI/cycle): 0.25
- Machine color: Ral 9007L / gray aluminum
- Operating temperature (min. - max.) (°C): +5 ... + 45
- Storage temperature (min. - max.) (°C): -30 ... +60
- Air humidity (max.) (%): 15...95; no condensation

+

Vertical flowpackaging line "Rovema"

Type VPK260 - 14114

- yoc 2001
- Performance (mech.) cycles/min: 180
- Roll width / diameter (max.) (mm): 450 / 550 (600 / 550 with pre-unrolling)
- Bag width (min. - max.) (mm): 60-260

- Bag length (min. - max.) (mm): 120-600
- Fill volume (max.) (cm³): 6000
- Sealing pressure (max.) (N): 5000 (optional: 8000)
- Program memory: Standard: 100 (optional: 1000)
- Dimensions: (L x W x H) (mm): 2.200 x 1.430 x 1.620 mm
- Weight: 920 kg
- Power supply (volts): 230 / 400
- Energy requirement (kVA): 8
- Protection class: IP54
- Compressed air connection: 6 bar
- Air consumption 6 bar (NI/cycle): 0.25
- Machine color: Ral 9007L / gray aluminum
- Operating temperature (min. - max.) (°C): +5 ... + 45
- Storage temperature (min. - max.) (°C): -30 ... +60
- Air humidity (max.) (%): 15...95; no condensation in good condition

+

carton box former – Packaging machine “Paal”

Type ELLE 3000 S

- Working capacity:
- Max. 14 cycles / minute
- Infeed capacity:
- Max. 70 bags / minute
- Format1 : Tray with sleeve
- Filling material designation: Stand-up pouch 1,5 kg
- Filling material dimensions: Approx. 180 x 70 x 300 mm
- Filling weight: 1,5 kg
- Grouping scheme: 1 x 5 standing
- Packaging type: Tray with internal, glued-in cover and cover protection
- Dimensions:
- Inlet height of filling material: 650 mm
- Outlet height of package: 500 mm
- Installation area: approx. 8000 x 6500 mm
- Please refer to the installation plan for the main dimensions (photo attached)
- 3 x 400V, 50Hz, 6kW
- Packaging machine: Type: Elematic 3000 LS/335

Interested? Contact us!
phone: +32 56 77 33 50 - email: info@barsso.com